


SWATHER HAULER™

Manufactured by **DUO LIFT** Mfg. Co., Inc.

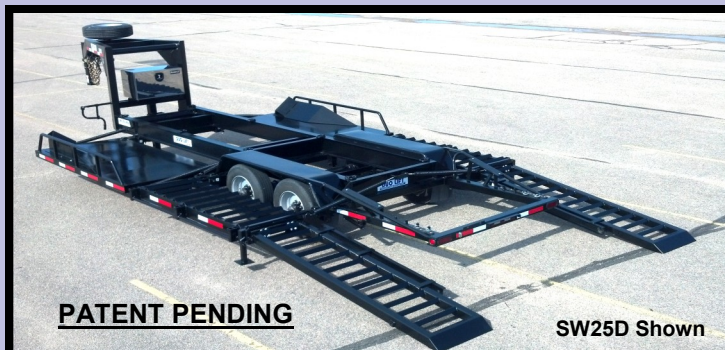

PATENT PENDING

SW25D Shown

Loading Position

Swather Hauler Trailers are Adjustable and Adaptable to Safely Carry Self Propelled Swathers and Windrowers



SW30D Shown

Folded Transport Position

Swather Hauler Folded Transport Width 102"

D.O.T Models	G.V.W.R.	Swather Capacity	Trailer Weight	Axles	Tires
SW25D	25,000 Lbs.	Up to 18,000 Lbs.	7,000 Lbs.	(2) 10,000 Lb. With Oil Bath Hubs	(4) 215/75R17.5 LRH Steel Belted Radials on Single Wheels
SW28D	28,000 Lbs.	Up to 20,000 Lbs.	7,500 Lbs.	(2) 12,000 Lb. With Oil Bath Hubs	(4) 235/75R17.5 LRH Steel Belted Radials on Single Wheels
SW30D	30,000 Lbs.	Up to 22,000 Lbs.	8,000 Lbs.	(2) 15,000 Lb. With Oil Bath Hubs	(8) 217/75R17.5 LRH Steel Belted Radials on Dual Wheels

(The Towing Vehicle Must be Rated to Tow the Gross Trailer Weight of the Swather Hauler Trailer)

SPECIFICATIONS:

- Color:** Gloss Black, Silver Wheels and White Splash Guards
- Frame:** (2) 10" x 4" Wide Flange Beams with (3) Heavy Wall Torque Tubes, (4) 4" x 4" HD Tubular Platform Supports and Spare Tire Carrier
- Dimensions:** Folded Transport Width 102" - Loaded Maximum Transport Width 159"
SW25D, SW28D - Length 31' & SW30D - Length 32', Swather/Windrower Loading Area 18', Platform Hgt: 21"
- Suspension:** SW25D - (4) 5-Leaf, 5,000 Lb., SW28D (4) 6-Leaf, 6,000 Lb., and SW30D (4) 7-Leaf 7,000 Lb., Slipper Springs with Equalizers
- Brakes:** SW25D - 12-1/4" x 3-1/2" Electric Brakes on Both Axles, 12-Volt Safety Breakaway System with Battery
SW28D & SW30D - 12-1/4" x 5" Electric Brakes on Both Axles, 12-Volt Safety Breakaway System with Battery
- Hitch:** 98" Gooseneck, Tapered Design, 8" x 4" Tubular Frame with Adjustable Height 2-5/16" Coupler and (2) 1/2" Safety Chains, 30,000 Lb. Capacity
- Fenders:** 14 Gauge Steel, Enclosed with White Splash Guards, 80" x 16". Outside to Outside 82"
- Park Stands:** (1) 12,000 Lb. Side-Wind, Drop Leg Jack, (2) Adjustable Height Rear Loading Jack Stands
- Lights:** 12-Volt, L.E.D., D.O.T. Stop, Turn, Tail, Marker, License Lamps, w/ 7-Way RV Trailer Electrical Connector and Wiring Enclosed in Steel Conduit or Sealed Electrical Cord
- Platforms:** **Caster Wheel Platforms:** Patent Pending, Folding Type, 46" x 98" Smooth Steel Top Plate Platforms, Spring Lift Assist Folding System, Locking Pins with Bolt-On Multi Position Caster Wheel Angling Guide Stops. **Allows Caster Wheels to Spin to the Forward Travel Position During Unloading.** Accommodates Caster Wheel Track from 108" to 129". **Drive Wheel Platforms:** Folding Type, 30" x 88" with Locking Pins, Spring Lift Assist Folding System and Removable Tire Guide Rails
- Ramps:** Slide Out, Roller Assisted, 24 1/2" x 102", Tubular w/Open Angle Iron Grousers & Tapered Ramp Edge
- Tie Downs:** (8) 5/8" x 3" x 3" D-Ring Chain Tie Down Locations
- Other:** D.O.T. Reflective Conspicuity Tape, HD Rear Bumper, Manual/Document Canister, Registration Holder, 17 Digit VIN Plate, Annual Federal Trailer Inspection with Inspection Certificate. Manufacturer's Certificate of Origin Furnished Upon Payment of Trailer
- Options:** Radial Spare Tire, Stainless Steel Tool Box w/Lockable Door, Amber Strobe Light Pkg. and Rear Hitch Pkg.
- Optional Colors:** Ag Green, Ag Red, Ag Yellow and Duo Lift Blue

DUO LIFT Manufacturing Company, Inc.

2810 38th Street • Columbus, Nebraska 68601

Phone: 402-564-8023 • FAX: 402-564-5385

Toll Free: 1-800-243-2583

Email: sales@duolift.com • Website: www.duolift.com

Authorized Dealer:



Trailer Frame

1-25-2016



PATENT PENDING

SW25D Shown

Swather Hauler Trailers are Adjustable and Adaptable to Safely Carry Self Propelled Swathers and Windrowers



Windrowers can be Loaded without a Header



SW30D Includes (2) 15,000 Lb. Axles and (8) 215/75R 17.5 LRH Tires on 17.5 Dual Wheels



Folding Caster Wheel Rotation and Support Platforms with Adjustable Position Tire Angling Guide Stops



Header Rest Supports

SW30D Shown

Rear View Loading Position with Slide Out Roller Assisted Ramps and Ramp Widening Rails



801232 Rear Receiver Hitch Option



Loaded 16' Rotary Disc Windrower



Loaded 16' Rotary Disc Windrower



Unloading a 16' Sickle Windrower