



FH500D / FH750D / FH990D / FH100D D.O.T. COMPLIANT

FUEL HAULER TRAILERS

Standard Features

FRAME	HEAVY DUTY STRUCTURAL CHANNEL FRAME AND FLAT TANK SUPPORT PLATFORM
TANK	BOLT-ON, SPRING CUSHIONED HIP TANK W/ROLL GUARDS, STAINLESS STEEL FUEL GAUGE, 3/16" TANK STEEL THICKNESS, (2) 2" TANK FILL LOCATIONS W/ LOCKABLE PRE-VENT CAPS WITH TANK VENTING STAINLESS STEEL BOTTOM TANK DRAIN PORT, LOCKING 2" FUEL SHUTOFF VALVE ON LOWER LEFT FRONT CORNER OF TANK
SUSPENSION	HIGHWAY RATED AXLES, TIRES AND WHITE SPOKE WHEELS; UNDER-SLUNG SLIPPER SPRINGS
BRAKES	4-WHEEL ELECTRIC BRAKES W/BREAKAWAY KIT
JACK	7,000 LB. DROP LEG, BOLT ON, TOP-WIND TONGUE JACK
PLATFORM	12" REAR PLATFORM, STEP AND GRAB HANDLE
FENDERS	HEAVY DUTY FLAT TOP STEEL FENDERS WITH FRONT RUBBERIZED COATING, AND BLACK SPLASH GUARDS
HITCH	2-5/16" ADJUSTABLE BALL COUPLER WITH (2) 3/8" SAFETY CHAINS AND ID TAGS
LIGHTS	D.O.T. LED LIGHTS CONFORMING TO CFR49 AND ENCLOSED IN CONDUIT OR LOOM WITH 7-WAY RV CONNECTOR
COLOR	TRAILER: BLACK TANK: SILVER
OTHER	CONSPICUITY TAPE, SAFETY SIGNS, DUO LIFT DECAL, (4) FUEL PLACARDS (NOT INSTALLED), 17 DIGIT VIN, ID PLATE AND MANUFACTURERS STATEMENT OF ORIGIN, MANUAL CANISTER, ANNUAL FEDERAL INSPECTION AND CERTIFICATE

Technical Data

MODEL	GVWR	AXLES	FRAME	TANK	WHEELS	EMPTY WT.
FH500D	7,000 LBS	(2) 3,500 Lb. Capacity Tandem Axles, 15'8" L X 84" W X 6' H	6" Heavy Duty Structural Channel Frame	500 Gallon Hip Tank with (1) Baffle, 3/16" Steel, D.O.T.. Approved	225/75R15D on 15" x 6" - 6 on 5.5" White Spoke Wheels	3,000 LBS
FH500D	14,000 LBS	(2) 7,000 LB Capacity Tandem Axles, 15' 8" L X 84" W X 6' H	6" Heavy Duty Structural Channel Frame	500 Gallon Hip Tank with (1) Baffle, 3/16" Steel, D.O.T.. Approved	235/80R16E on 16" x 8" - 8 on 6.5" White Spoke Wheels	3,400 LBS
FH750D	14,000 LBS	(2) 7,000 LB Capacity Tandem Axles, 17'4" L X 84" W X 6' H	7" Heavy Duty Structural Channel Frame	750 Gallon Hip Tank with (2) Baffles, 3/16" Steel, D.O.T. Approved	235/80R16E on 16" x 8" - 8 on 6.5" White Spoke Wheels	4,000 LBS
FH990D UNAVAILABLE IN CANADA	14,000 LBS	(2) 7,000 LB Capacity Tandem Axles, 19'6" L X 84" W X 6' H	7" Heavy Duty Structural Channel Frame	990 Gallon Hip Tank with (3) Baffles, 3/16" Steel, D.O.T.. Approved	235/80R16E on 16" x 6" - 8 on 6.5" White Spoke Wheels	4,500 lbs
FH1000D	14,500 LBS	(2) 7,000 LB Capacity Tandem Axles, 20' L X 84" W X 6' H	76" Heavy Duty Structural Channel Frame	(2) 500 Gallon Hip Tank with (1) Baffle, 3/16" Steel, D.O.T.. Approved <i>NOTE: DIESEL FUEL IN BOTH TANKS CAN BE COMBINED OR SEPARATELY DISPENSED.</i>	235/80R16E on 16" x 8" - 8 on 6.5" White Spoke Wheels	5,000 LBS



FH500D / FH750D / FH990D / FH100D D.O.T. COMPLIANT


FUEL HAULER TRAILERS

Optional Features

- 20 - 25 GPM, 12V DIESEL PUMP W/10 MICRON FILTER, 25' HOSE, SWIVEL WITH AUTO NOZZLE, AND 30' POWER CORD WITH BATTERY CLAMPS
- 30 - 35 GPM, KOHLER GAS ENGINE POWERED DIESEL PUMP W/10 MICRON FILTER, 25' HOSE REEL, SWIVEL AND AUTO NOZZLE
- 40 - 55 GPM, KOHLER GAS ENGINE POWERED DIESEL PUMP, (2) 10 MICRON FILTERS, 50' HOSE REEL, SWIVEL, AUTO NOZZLE AND NOZZLE HOLDER
- 35' DIESEL HOSE REEL WITH NOZZLE HOLDER, SWIVEL & AUTO NOZZLE IN-LINE DIESEL FUEL METERS, 30 GPM OR 50 GPM CAPACITY
- 50, 80 OR 100 GALLON 12V D.E.F. SYSTEM, 120V DEF TANK HEATER BLANKET, DEF FILTER
- D.E.F. TRANSFER SYSTEM FOR PUMPING DEF ONTO TRAILER
- 7,000 LB. SIDE WIND DROP LEG JACK, BOLT-ON
- 25' D.E.F. REEL WITH NOZZLE HOLDER WITH DRIP CONTAINMENT, SWIVEL AND AUTO NOZZLE
- IN-LINE DIGITAL D.E.F. METER
- 50" FRONT OR 50" REAR ENCLOSURE WITH LOCKABLE TOP, SIDE AND REAR DOORS
- ALUMINUM DIAMOND PLATE GRAVEL GUARD FOR FRONT OF ENCLOSURE & FRONT OF FENDERS
- SPARE TIRE, SPARE TIRE CARRIER AND SPARE TIRE COVER
- 12V COVERED POWER SOCKET WITH LED DOME LIGHT AND 12V LED SPOT LIGHT
- LIGHT PACKAGE (FH500-FH750-FH990 OFF ROAD MODELS)
- ALUMINUM 16" - 8 BOLT WHEELS
- BLUE, GREEN, RED OR YELLOW PAINT COLOR FOR TANK OR TRAILER
- AG LIGHT PACKAGE FOR OFF ROAD MODELS



KOHLER POWERED 30-35 GPM DIESEL PUMPING SYSTEM, 12V DEF PUMP AND HOSE REELS

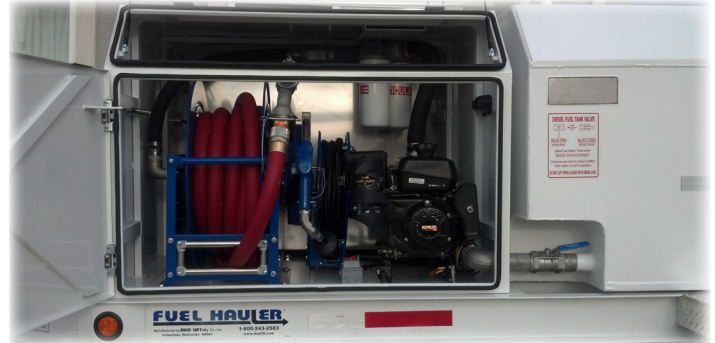

KOHLER POWERED 40-55 GPM DIESEL PUMPING SYSTEM WITH 80 GALLON D.E.F. TANK



12V, 20-25 GPM DIESEL PUMPING SYSTEM WITH 25' DIESEL HOSE




OPTIONAL 50, 80 OR 100 GALLON D.E.F. SYSTEMS (100 GALLON SHOWN) OPTIONAL 120V 835 Watt, Auto Temperature Controlled, D.E.F. Tank Heater Blanket (40°F to -10°F Operational Temperature)



D.E.F. TRANSFER SYSTEM OPTION



PATENT PENDING DIESEL AND D.E.F. STAINLESS STEEL NOZZLE HOLDERS W/ DRIP CONTAINMENT TUBES



SPRING CUSHIONED, BOLT-ON DIESEL TANK

